


Note:

- Electrical Characteristics:
  - Contact Current Rating: 1.5 Amperes.
  - Dielectric Withstanding Voltage: AC 100V r.m.s
  - Insulation Resistance: 100 MΩ Minimum.
  - Contact Resistance: 30mΩ Milliohms Maximum.
- Mechanical Characteristics:
  - Contact Insertion Force: 4.00kgf Maximum.
  - Contact Separation Force: 1.00kgf Minimum.
- Environmental:
  - Operating Temperature: -40°C~+60°C.
- Material:
  - Housing: Thermoplastic UL 94V-0 Rated.
  - Contact: Copper Alloy (t=0.25mm).
  - Shell: K5 Alloy (t=0.40mm).
- RoHS Compliance

**ORDER INFORMATION:**

1394-R110-X X XX

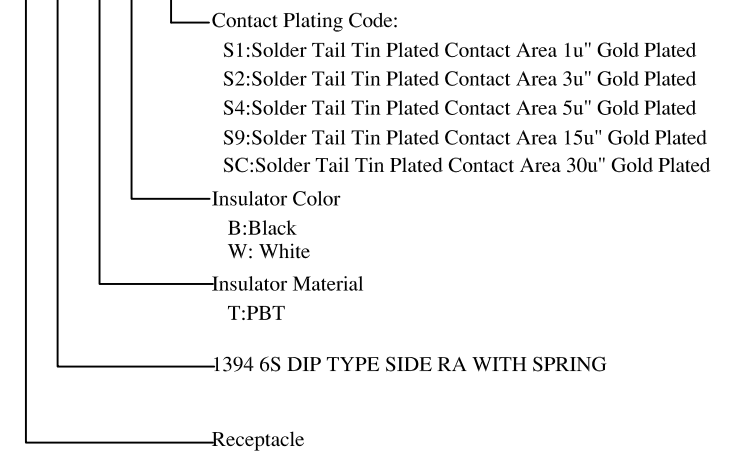

RECOMMEND P.C.B LAYOUT(TOP VIEW)  
(TOLERANCE:±0.05mm)

TOLERANCE		GENESIS TECHNOLOGY, INC A Genesis Electro-Mechanical Company	TITLE:	
LINEAR	ANGLES		1394 6PIN R/A DIP	
X. ± 0.50	X° ±3°	7F, No. 191, Sec. 2 Chung-Yang Rd., Tu-Cheng City Taipei Hsien, Taiwan	PART NO. 1394-R110-XXXX	
.X ± 0.38	.X° ±3°		DWG NO. GTI08-25011	
.XX ± 0.25	.XX° ±3°	APPD:	MAT'L:	UNITS SCALE SHEET REV mm NONE 1 OF 1 X01
.XXX ± 0.10	.XXX° ±3°	CHKD:	FINISH:	
		DRWN: Kathy-Tan	Q'TY:	

X01	ISSUED	Vegas	04/15/08'
REV.	ECN NO.	NAME	DATE

A  
B  
C  
D  
E

A  
B  
C  
D  
E